Aspect/Endure CA Sash Removal (ROTO)

Three-Arm Linkage



Two-Arm Linkage (small units)



Open sash to expose the hardware arms and linkage







On long arm to sash, use a flat screwdriver or similar to open clip below arm near latch side of sash. Open clip and then remove the arm from the sash.

10190 OH-21 • Strasburg, OH 44680 • Phone: 800.669.4711 • Fax: 877.735.2057 • provia.com





On short arm to sash, use a flat screwdriver or similar to open clip below arm near hinge side of sash. Open clip and then remove the arm from the sash.



Lift and remove short arm from sash.



Move arm away from sash.


10190 OH-21 • Strasburg, OH 44680 • Phone: 800.669.4711 • Fax: 877.735.2057 • provia.com



Place CA wrench below cam arm



Lift arm off cam nut

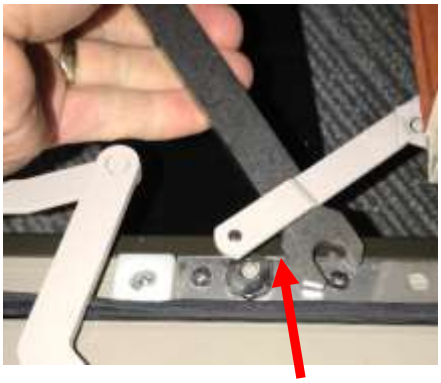

Move arm from sill



At the top of the sash, use CA wrench to remove top cam arm.



Remove top arm away from frame

.

10190 OH-21 • Strasburg, OH 44680 • Phone: 800.669.4711 • Fax: 877.735.2057 • provia.com





Holding sash secure, slide top and bottom sash shoes to open side of track and remove sash from frame.





Re-install sash and hardware arms in reverse order. Note that the sash shoe locks into the lip on the sash track top and bottom.

10190 OH-21 • Strasburg, OH 44680 • Phone: 800.669.4711 • Fax: 877.735.2057 • provia.com