Schlage Greene Exterior Handleset
with the Ganton Knob or Latitude Lever

EXTERIOR

Greene



INTERIOR

Greene
with Ganton Knob



Greene
with Latitude Lever



[ProVia KB - Schlage Greene Grip Handle Installation Instructions]


SCHLAGE® CUSTOM™ HARDWARE

2027 NEW

AVAILABLE FINISHES



a. Keys (2)
b. Bolt
c. Bolt strike
d. Reinforcement strike
e. Reinforcement screws
f. Interior plate
g. Plate screws
h. Handle
i. Latch
j. Latch strike
k. Latch/Bolt/Strike screws (8)
l. Chassis
m. Chassis screws
n. Knob/Lever
o. Washer
p. Handle bolt
q. Bolt cover
r. Drive-in faceplate
s. Hex wrench (Do not discard!)
t. FCT60F ONLY: UL cup

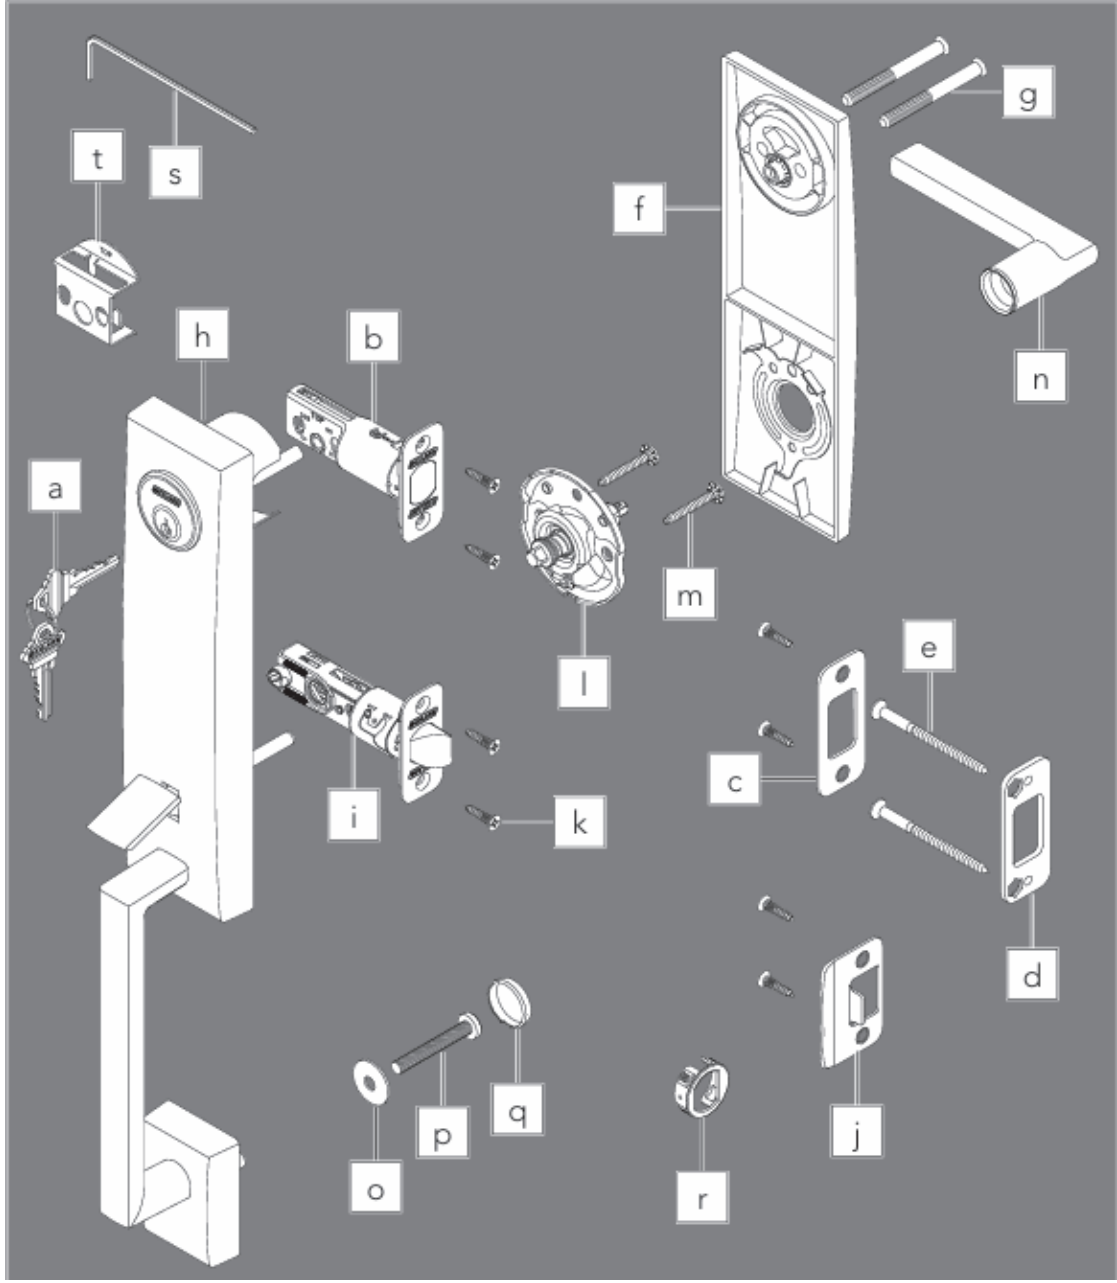


[ProVia KB - Schlage Greene Grip Handle Installation Instructions]

Spec	Schlage Greene sell sheet (MR-6277-GEE, FCT Series)
Cross bore	Grip 2-1/8"; deadbolt 2-1/8" or 1-1/2"
Edge bore	1"
Latch backset	Adjustable to 2-3/8" or 2-3/4"
Bore spacing	Guaranteed fit on standard 5.5" center-to-center pre-drilled doors
Door thickness	1-5/8" to 2-1/4" standard
Throw	Deadbolt 1"; handle (latch) 1/2"
Latch faceplate	1" x 2-1/4"; round corner, square corner or drive-in
Strikes	Deadbolt strike 1-1/4" x 3-5/8"; handle strike 2-1/4" full lip
Adjustable through-bolt	Diagram range 8-3/8" to 9-7/8", 1-1/2" of adjustment
Cylinder and keys	5-pin tumbler, C keyway; 2 keys per lock
Functions	Single-cylinder and non-turning

ADJUSTABLE THROUGHBOLT




The Adjustable Throughbolt provides additional 1-1/2" flexibility.

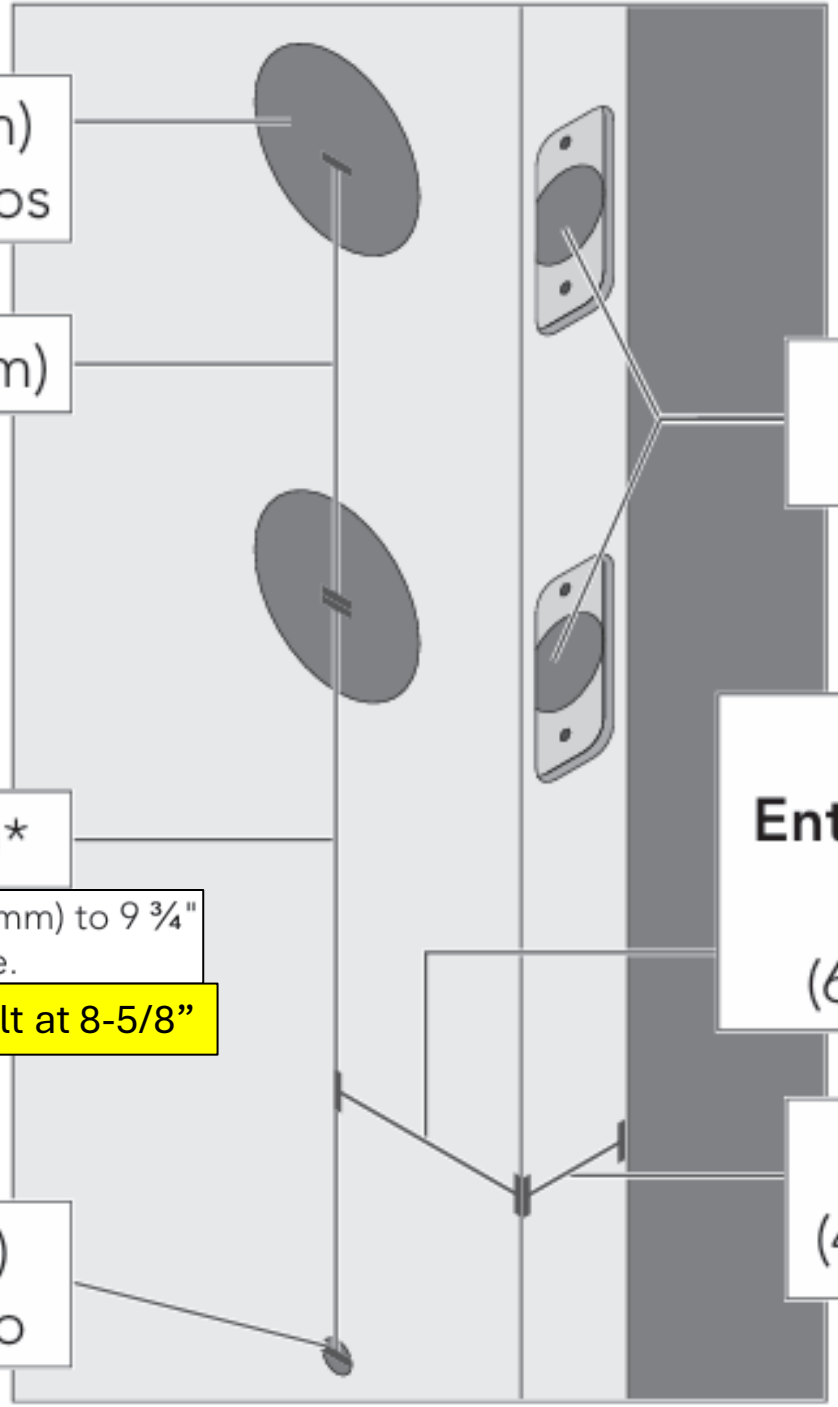

* May vary from 8 ¼" (210 mm) to 9 ¾" (248 mm) for existing hole.

ProVia preps the Throughbolt at 8-5/8”

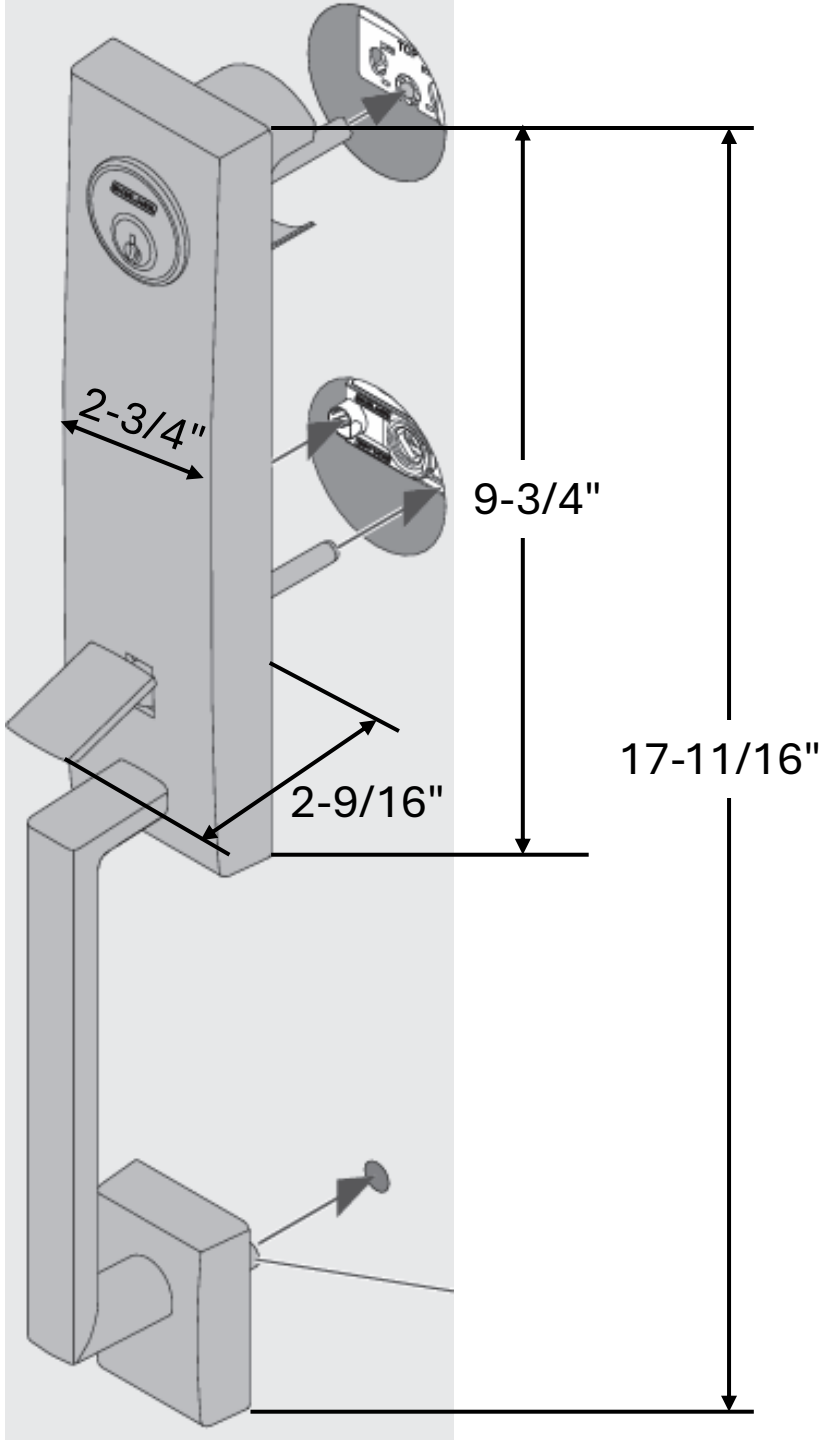
2-3/4"
9-3/4"
17-11/16"
2-9/16"